



POLARIS 12

RECESSED MICRO LED LINEAR



Code	LED/m	Wattage/m	Lumen/m	Cutting/cm	Colour Temp (K)
P12/1/OS/120	120	9.6	780	5	4000K
P12/1/OS/70	70	15	2100	10	4000K

Please note: Due to the small size of this luminaire the drivers are remote mounted. As surface mounting box can be supplied by request.

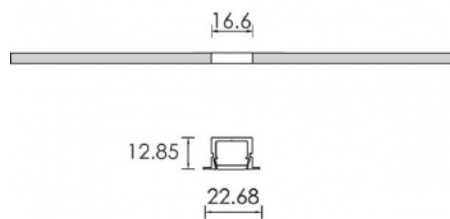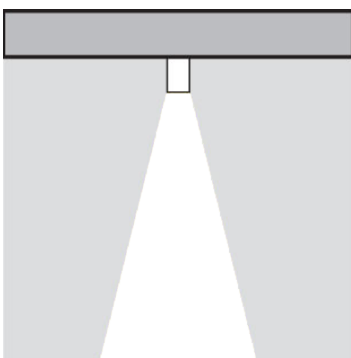

L max : 4500 mm

Classification: 100% Downlight
CRI: >80
Life Expectancy: 30,000 Hours
IP Rating: IP40

Impact Rating: IK05
Downlight Diffuser: Uses Opal Satin Diffuser
Suspension Length: 1.25m Suspension