



SPECIFICATION DATA

Code	Diffuser	Finish	Size (mm)	Delivered Lumens (lm)	Total System Wattage (W)	Efficacy (lm/cw)	Colour Temp (°K)	CRI
CSM/15/F/5300/4K8	Opal	Grey	1500	5300	57	93	4000K	>85

- 3 year warranty
- See website for LDT files
- For CAD/BIM contact us
- For bespoke lengths please contact us
- See website for Technical Data Sheet
- IP65

Construction

- Lightweight
- Grey powder coated finish
- Aluminium reflector and heat sink
- European Branded Driver

Features

- Ultra slim design
- Opal diffuser

Applications

- Production environments
- Public buildings
- Hospitals
- Offices
- Carparks
- Outside areas

Benefits

- Easy to install
- IP65

Optical Options

Code	Description
OP	Opal

CCT Options


Code	Description
4K8	4000K (Standard)

Control Options

Code	Description
D	DALI
S	Switchdim control
MS	Microwave Sensor

For DALI control, replace 'F' in part number with 'D' for SwitchDim replace 'F' with 'S' for Microwave sensor add MS to the end.

Dimensions

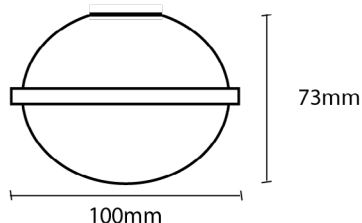

Mounting Options

Code	Description
N/A	Surface

Finish Options

Code	Description
W	Grey

Emergency Options

Code	Description
/EM	3 hour maintained, manual test
/ED	3 hour maintained, DALI / Self Test

For emergency version, add onto end of part number as required



HEAD OFFICE: Unit 4, Charlton Mead Lane, Hoddesdon, Hertfordshire EN11 0DJ
 SHOWROOM: 121-131 Rosebery Ave, London EC1R 4RF
 SHOWROOM: 1 New York St, Manchester M1 4HD

01992 445828

Enabled
 Licensing Program for LED
 Luminaires and Retrofit Bulbs

Member
 Synergy Commercial
 Lighting Limited