



SPECIFICATION DATA

| Code | Finish | Size (mm) | Delivered Lumens (lm) | Total System Wattage (W) | Efficacy (lm/cw) | Colour Temp (°K) | CRI |
|-----------------------|-------------------|-----------|-----------------------|--------------------------|------------------|------------------|-----|
| TRX/F/1100/3K8 | See bezel options | 195 ø | 1139 | 11.1 | 102.6 | 3000 | >80 |
| TRX/F/1100/4K8 | See bezel options | 195 ø | 1052 | 9.9 | 106.3 | 4000 | >80 |
| TRX/F/2000/3K8 | See bezel options | 195 ø | 1881 | 19.4 | 97.0 | 3000 | >80 |
| TRX/F/2000/4K8 | See bezel options | 195 ø | 1858 | 18.2 | 102.1 | 4000 | >80 |
| TRX/F/3000/3K8 | See bezel options | 195 ø | 2677 | 26.4 | 101.4 | 3000 | >80 |
| TRX/F/3000/4K8 | See bezel options | 195 ø | 2820 | 26.4 | 106.8 | 4000 | >80 |
| TRX/F/4000/3K8 | See bezel options | 195 ø | 4200 | 46.5 | 90.3 | 3000 | >80 |
| TRX/F/4000/4K8 | See bezel options | 195 ø | 4550 | 46.5 | 97.8 | 4000 | >80 |

- 5 year warranty
- See website for LDT files
- For CAD/BIM contact us
- For bespoke lengths please contact us
- See website for Technical Data Sheet
- IP20



Construction

- Professional LED downlight
- Range of Bezel options
- 60° satin etch reflector as standard
- Tridonic Advance LED

Features

- IP20
- L80 / F10 @ 50,000 hours
- Wide-beam light distribution

Applications

- Commercial and Business Areas
- Public buildings
- Housing
- Offices
- Hotels and Restaurants
- Arts and Culture spaces

Benefits

- Custom-fit options
- Contemporary style
- Part L and ECA compliant

CCT Options

| Code | Description |
|------------|------------------|
| 4K8 | 4000K (Standard) |
| 3K8 | 3000K |

For 3000K version, replace '4K8' in part number with '3K8'

Control Options

| Code | Description |
|----------|-------------------|
| D | DALI |
| S | Switchdim control |


For DALI control, replace 'F' in part number with 'D' for SwitchDim replace 'F' with 'S'

Emergency Options

| Code | Description |
|------------|----------------------------------|
| /EM | 3 hour maintained, manual test |
| /ED | 3 hour maintained DALI/Self Test |

For emergency version, add onto end of part number as required

Dimensions

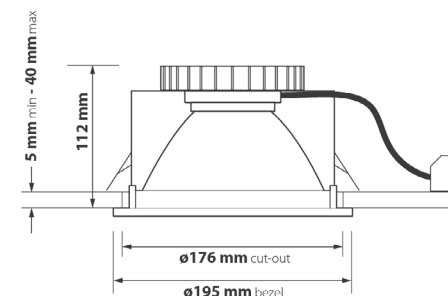

Bezel Options



TRX/BEZ/WH
White RAL 9010 bezel



TRX/BEZ/BW
Brilliant white RAL 9016 bezel



TRX/BEZ/CH
Chrome bezel



TRX/BEZ/BA
Brushed Aluminium bezel

Attachments Options



TRX/BEZ/VH
Frosted vertical ring. Requires bezel



TRX/BEZ/HDG
Halo Drop Glass on white bezel



TRX/BEZ/IP54/CG
IP54 Clear Glass. Requires bezel



TRX/BEZ/IP54/OP
IP54 Opal polycarbonate. Requires bezel



TRX/BEZ/HL/F
Frosted hi-light ring. Requires bezel



HEAD OFFICE: Unit 4, Charlton Mead Lane, Hoddesdon, Hertfordshire EN11 0DJ

SHOWROOM: 121-131 Rosebery Ave, London EC1R 4RF

SHOWROOM: 1 New York St, Manchester M1 4HD

01992 445828



Enabled
Licensing Program for LED
Luminaires and Retrofit Bulbs

Member
Synergy Commercial
Lighting Limited

