

Lega LED Linear Spot

Magnetic Track Lighting

SVIELTO



SPECIFICATION DATA

Code	Finish	Beam Angle (°)	Size (mm)	Delivered Lumens (lm)	Total System Wattage (W)	Efficacy (lm/cw)	Colour Temp (°K)	CRI
TBC	Black	20° / 30°	285	640	5.6	144	4000	90
TBC	Black	20° / 30°	570	1280	10.2	145	4000	90
TBC	Black	20° / 30°	850	1665	15.2	145	4000	90

- 5 year warranty
- See website for LDT files
- For CAD/BIM contact us
- See website for Technical Data Sheet



TRIDONIC



Lega LED Linear Spot

Magnetic Track Lighting



Construction

- Extruded aluminium
- Extruded PMMA

Features

- Remote electronic transforme
- IP40

Applications

- Commercial and Business Areas
- Public buildings
- Co-work spaces
- Offices
- Hotels and Restaurants
- Arts and Culture spaces

Benefits

- Contemporary style
- Energy efficient solution

Optical Options

Code	Description
N/A	Opal

CCT Options

Code	Description
4K8	4000K (Standard)
3K8	3000K

For 3000K version, replace '4K8' in part number with '3K8'

Control Options

Code	Description
N/A	DALI
N/A	Switchdim control

For DALI or Switchdim control, please contact sales team. Remote driver only

Mounting Options


Code	Description
S1	Low voltage standard track
S2	Low voltage track double emission
S5	Low voltage trimless track
S8	Low voltage recessed track

Finish Options

Code	Description
B	Black (Standard)
W	White
G	Grey

For White finish, replace 'B' in part number with 'W' for Grey replace 'B' with 'G'

Dimensions

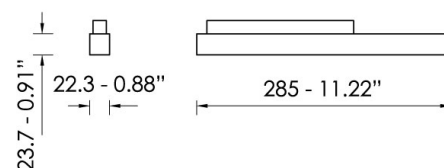

HEAD OFFICE: Unit 4, Charlton Mead Lane, Hoddesdon, Hertfordshire EN11 0DJ

SHOWROOM: 121-131 Rosebery Ave, London EC1R 4RF

SHOWROOM: 1 New York St, Manchester M1 4HD

01992 445828

Enabled LED
Licensing Program for LED
Luminaires and Retrofit Bulbs

Member
Synergy Commercial
Lighting Limited

