

Smart Pro High Output

Surface or Recessed Emergency Lighting



SPECIFICATION DATA

Code	Finish	Diffuser	Size (mm)	Delivered Lumens (lm)	EM duration (Hrs)	Integral Test Routine	Battery Recharge Period
SPEW/R/HO/DST/OA/BLK	Black	Corridor/wide lens	142x43	260	3	EN62034/DALI	24 hours
SPEW/R/HO/DST/OA/WHI	White	Corridor/wide lens	142x43	260	3	EN62034/DALI	24 hours

- Non-maintained, self contained
- 5 year warranty, 1 year battery warranty
- DALI as standard
- Can be recessed by remove the surface mount collar
- Comes with corridor and wide angle lens
- BESA box mountable
- DALI as standard
- Easy to install
- 130mm dia cut-out for recessed

Mounting height Hm (m)	Access Corridor		Access Wide Angle	
	Spacing (m) min 0.5Lux open area	Spacing (m) min 1Lux escape	Spacing (m) min 0.5Lux open area	Spacing (m) min 1Lux escape
2.0	n/a	14.0	13.9	12.8
2.5	n/a	15.3	15.1	14.0
3.0	n/a	16.5	14.8	13.6



Smart Pro High Output

Surface or Recessed Emergency Lighting



Construction

- Aluminium
- LiFePO4 battery
- IP40
- Integral automatic Self-Test

Features

- Built in driver
- Self-contained
- Non-maintained

Applications

- Commercial and Business Areas
- Public buildings
- Co-work spaces
- Offices
- Hotels and Restaurants
- Arts and Culture spaces

Benefits

- Flexible and easy to install
- Energy efficient solution
- Compact design

Optical Options

Code	Description
n/a	LED corridor lens
n/a	LED wide angle




Mounting Options

Code	Description
n/a	Surface
n/a	Recessed



Dimensions

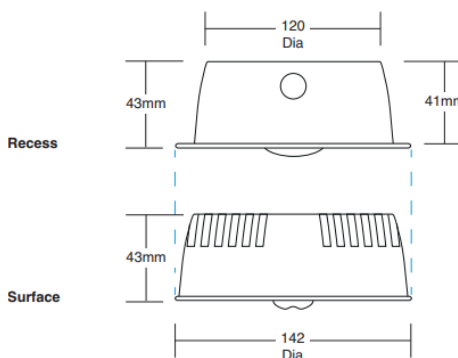

Finish Options

Code	Description
BLK	Black
WHI	White



Please note, The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



HEAD OFFICE: Unit 4, Charlton Mead Lane, Hoddesdon, Hertfordshire EN11 0DJ

SHOWROOM: 121-131 Rosebery Ave, London EC1R 4RF

SHOWROOM: 1 New York St, Manchester M1 4HD

01992 445828

